

BRISTAN

Installation Instructions & User Guide

Please leave these instructions
with the end user

Product Code: AL BF Range (D1)


Specification

Dynamic Water Pressure
Min: 0.2 bar Max: 5.0 bar




Maximum Static Pressure: 10.0 bar

Inlet Water Temperature




Maximum Hot: 65°C

Inlet Connections




3/4" BSP

Outlet



Recessed M16.5
Flow Straightener

Pack Contents

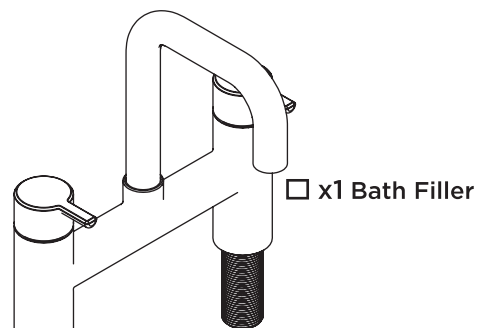

□ x1 Bath Filler

□ x2 Plinth


□ x2 Plinth Seal

□ x2 Rubber Washer


□ x2 Backnut

Operation

Hot



Cold



Spout

Tools Required



Crosshead
Screwdriver




31 mm
Box Spanner



17 mm
Hex Key



2 mm
Hex Key



2.5 mm
Hex Key



8 mm
Hex Key



Adjustable
Spanner

Prior to Installation

All products manufactured and supplied by Bristan are safe to use provided that they are installed, operated and receive regular maintenance in accordance with these instructions.

This product needs to be installed in accordance with, and meet the requirements of The Water Supply (Water Fittings) Regulations (Northern Ireland) 2009 and The Water Supply (Water Fittings) (Scotland) Byelaws 2014.

For full Installation Requirements & Notes (IRN) please visit
www.wrasapprovals.co.uk/approvals-directory

Isolation valves must be fitted to the inlet water supplies to ensure ease of future maintenance.

Before installing this product the water supply must be thoroughly flushed in order to remove any swarf, solder etc. Full access must be made available for future maintenance/servicing purposes.

This product must not be modified in any way as this will invalidate the guarantee.

Spare Parts




To replace any spare parts
for your tap, why not scan
the QR Code or visit
www.bristan.com and
search for your product.

Installation


1

Feed the threaded
inlets through the
plinths, ensuring
the rubber seals
are in place.

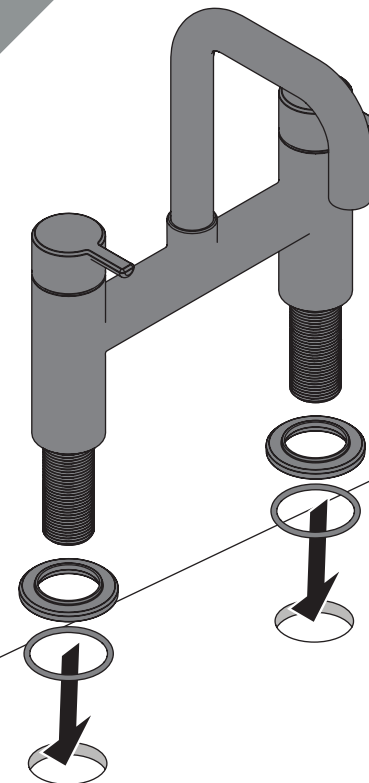

Continue to
thread the tails
through the tap
holes.



2



Rubber Washer


Backnut

Slide the rubber washer
onto the threaded tail
followed by the backnut.



Tighten the backnut until
the tap is held securely in
place.

3




Connect the hot and cold
water supplies to the
threaded tails.

4

IMPORTANT
Turn on water
supply for a few
minutes and check
all joints and
connections for
any leaks.

**Your tap is now
ready for use.**

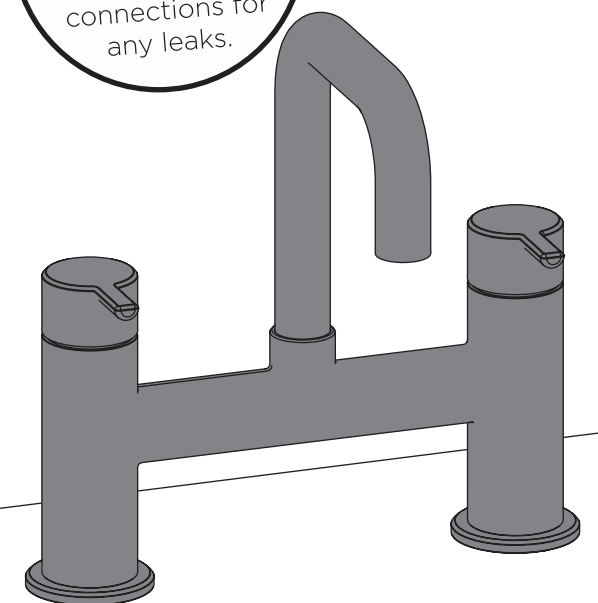

Hot

REMEMBER
Hot on the
left, cold on
the right.

Cold

Valve Replacement

1

Remove the rear cap and grub screw, then lift off the handle.

2

Remove the screw and spline adaptor.

3

Unscrew the valve to remove.

For replacement valves, see **SPARE PARTS**.

4

Reverse steps to replace the valves and handles.

Spout Seals Replacement

- Isolate water supply before starting!

1

Remove the grub screw from the rear of the tap and lift out the spout.

2

Unscrew the spout connector.

Take note of spout seal positions, then remove them.

3

For replacement seals kit, see **SPARE PARTS**.

Apply a WRAS approved grease to the new seals kit.

4

Place the new seals kit onto the spout connector and screw back into tap body.

Replace the spout and grub screw.

Outlet Cleaning

1

Insert an M16.5 key (not supplied) into the outlet and twist to remove.

(Reverse to replace)

2

Check all loose parts for damage and then soak using a suitable solution to de-scale.

Troubleshooting

Symptom	Cause	Remedy
Low Flow	Partially closed isolation valve.	Open isolation valve.
	Airlock or partial blockage in the supply pipework.	Flush through pipework to ensure removal of debris and any airlocks.
	Partial blockage in the outlet	Remove to Clean and soak in suitable solution.
No hot water or cycling hot and cold	Instantaneous water heater cycles on and off as flow rate or pressure is too low.	Increase water flow rate or pressure through system.
No Flow	Closed isolation valve.	Open isolation valve.
	Mains water supply turned off.	Turn on mains water supply.
Temperatures not corresponding with taps	Inlet pipes have been connected incorrectly	Swap the inlet tails around.

General Cleaning

Bristan products are made from premium materials, with hand polished, electroplated, PVD or EPD finishes.

Your taps or shower should be regularly cleaned with warm water, a mild pH-neutral liquid soap, and polished with a soft cloth. Any residues from soap, toothpaste, shampoos and shower gels can cause blemishes if not rinsed off straight after use.

Household bleaches and cleaners contain harsh chemicals and may damage the surface finish. Avoid using abrasive cloths, scouring pads, scrub sponges, steel wool or anything similar.

Contact Us

BRISTAN

Part of **BRISTAN GROUP**

Bristan Group Ltd.
A Masco Company

UK: Bristan Group,
Pooley Hall Drive,
Birch Coppice Business Park,
Dordon, Tamworth
B78 1SG.

EU: Masco Europe S.à.r.l.
14 Rue Strachen
6933 Mensdorf
Luxembourg

Email Us: enquire@bristan.com
Website: www.bristan.com
Call Us: +44330 026 6273

Our Guarantee

At Bristan, we want to make things as easy as possible for our customers. That's why we offer solid guarantees on all our products, effective from the date of purchase, to give you peace of mind.

Your guarantee starts from the purchase of your product, but you can still benefit from registering it for easier identification in the unlikely event of a manufacturing fault, please visit www.bristan.com/register

For any other queries, please call Customer Service on 0330 026 6273 where our expert team of advisors will be able to offer you any help and advice.

For full guarantee terms and conditions visit www.bristan.com/service-centre/guarantees

