

CRZ SHXDIVCTFF BB

CRAZE Shower Range Craze Brushed Brass Adjustable Telescopic Riser Diverter Bar Shower



Features:

- On-trend brushed brass finish to make a statement in your bathroom.
- Supplied with our wallmount 12 fixing kit. The simplest solution for installing, maintaining and replacing bar mixer showers, using built in front-of-wall isolation valves and 15mm inlet connections
- Dual control - Flow and temperature are controlled separately giving accurate control of both
- Thermostatic cartridge with preset temperature stop at 38°C to eliminate the ability to select an unsafe temperature and can be adjusted up to a maximum of 43°C
- All in one box - Includes hose, height adjustable riser rail, a rub-clean anti-limescale shower rose and single function handset so nothing to buy separately

Product Certifications:




For more products,
visit our website:
<http://www.bristan.com>



Specification

Finish/Colour:	Brushed Brass
Main Construction Material:	ABS; Zinc Alloy
No of Controls:	2
Shower Type:	Bar Shower
Shower Head Type:	Both
Shower Kit:	Telescopic Riser with Fixed Head
Valve/Cartridge Type:	25mm Single Lever Cartridge
Maximum Hot Water Supply Temperature °C:	65
Plumbing System Suitability:	Suitable for high pressure systems
Minimum Dynamic Pressure (bar):	1
Maximum Dynamic Pressure (bar):	5
Maximum Static Pressure (bar):	10
Connection Inlet:	15mm Compression via WMNT12
Connection Outlet:	G1/2" and Riser Outlet
Isolation Valve Included:	Yes
Check Valve Included:	Yes

Dimensions (measurements in mm)

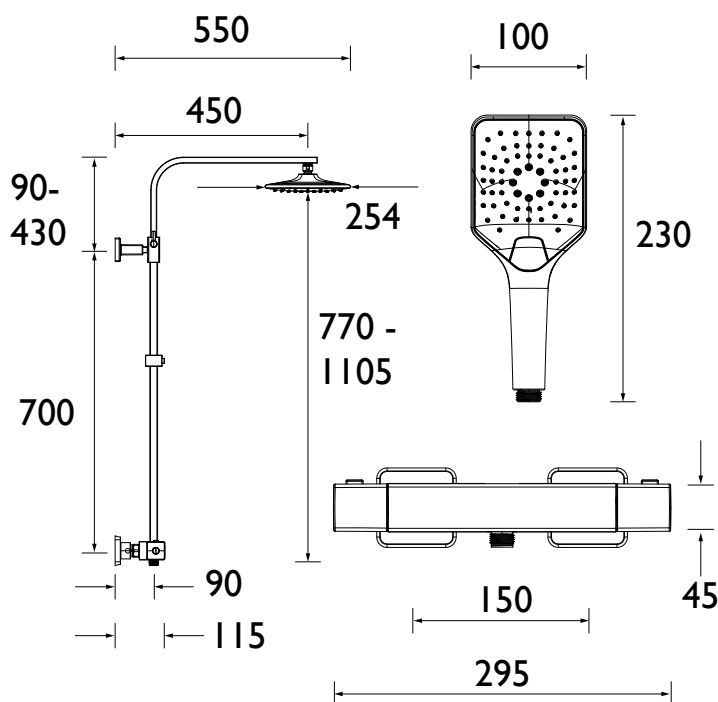

Flow Rates (l/min)

System Pressure (bar)	1	2	3	5
Through Handset (mixed)	5.4	7.5	9.9	12.9
Through Fixed Head (mixed)	5	8	10	13

TECHNICAL
DATA
SHEET



BRISTAN

D1

Bristan, Birch Coppice Business Park, Dordon, Tamworth, B78 1SG. Web Site: www.bristan.com Telephone: 0330 026 6273. Email: enquire@bristan.com.

* - Lifetime guarantee applies to products purchased on or after 01/04/2026. See www.bristan.com/guarantees for more information. The information contained on this page was correct at date of issue. Listed flow rates are indicative for the product. Different plumbing systems and flow regulators can produce higher or lower results. Fitting Dimensions are provided as a guide only. Some variation may occur due to manufacturing tolerances. Bristan pursues a policy of continuous improvement in design and performance of its products and so reserves the right to change specifications without prior notice.