

# AS2 WMT THBSMVO C


## ASSURE Tap Range Assure TMV2 Wall Mounted Thermostatic Bath Shower Mixer Valve Only Chrome



### Features:

- Supplied with Fast Fix Isolating wallmount 12 kit.
- TMV2 thermostatic temperature control to prevent surges of hot or cold water
- Integral diverter valve
- 15mm inlet connections

### Product Certifications:




For more products, visit our website:  
<http://www.bristan.com>



### Specification

<b>Product Type:</b>	Bathroom Tap
<b>Main Construction Material:</b>	Brass
<b>Mount Type:</b>	Wall Mounted
<b>Connection Inlet:</b>	G 3/4"
<b>Connection Outlet:</b>	15mm Compression
<b>Number of Tap Holes:</b>	2
<b>Valve/Cartridge Type:</b>	1/2" Quarter Turn Ceramic Disc Valve
<b>Plumbing System Requirements:</b>	Suitable for all plumbing systems
<b>Minimum Dynamic Pressure:</b>	0.5 bar
<b>Maximum Dynamic Pressure:</b>	5.0 bar
<b>Maximum Hot Water Temperature: °C</b>	65
<b>Maximum Static Pressure: (bar)</b>	10
<b>Flow Type:</b>	Single
<b>Isolation Included:</b>	Yes

### Dimensions (measurements in mm)

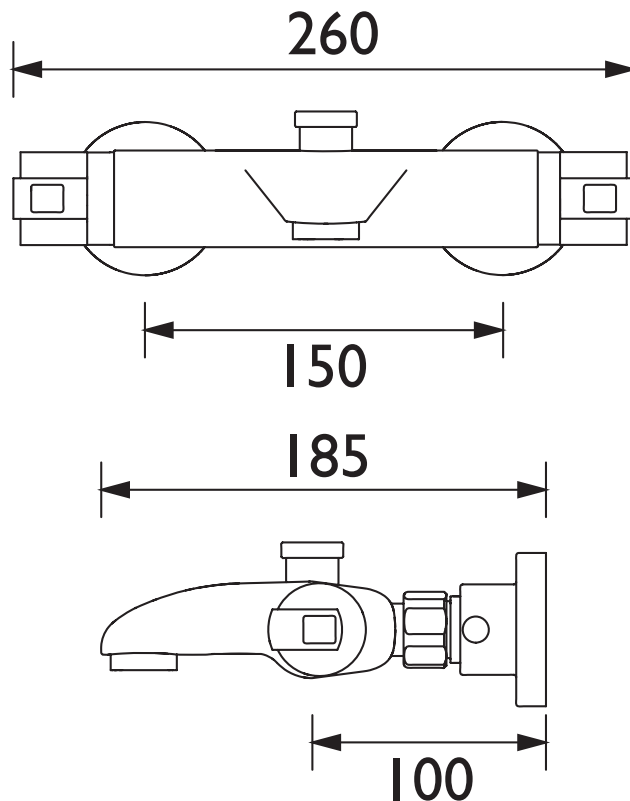

### Flow Rates (l/min)

System Pressure (bar)	0.5	1	2	3	5
Through Bath Filler (Mixed)	11.3	15.9	22.6	27.7	35.7

## TECHNICAL DATA SHEET



# BRISTAN

D3