PM SLWMBF C

PRISM Tap Range Prism Single Lever Wall Mounted Bath Filler Chrome



Specification					
Product Type:	Bathroom Taps				
Main Construction Material:	Brass				
Mount Type:	Wall Mounted				
Handle Type:	Lever Handle				
Connection Inlet:	15mm Compression				
Connection Outlet:	M28 Flow Straightener				
Number of Tap Holes:	2				
Valve/Cartridge Type:	45mm Ceramic Cartridge				
Plumbing System Requirements:	Suitable for all plumbing systems				
Minimum Dynamic Pressure:	0.5 Bar				
Maximum Dynamic Pressure:	5.0 Bar				
Maximum Hot Water Temperature: °C	65				
Maximum Static Pressure: (bar)	10				
Flow Type:	Single Flow				
Isolation Included:	No				


Dimensions (measurements in mm)

Features:

- Long life ceramic cartridge for added durability and ease of
- Easy to use lever handle
- High performance at pressures as low as 0.2 bar

Product Certifications:



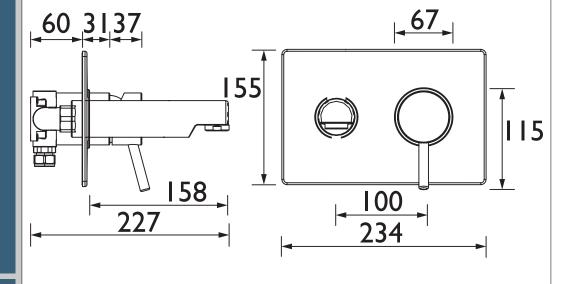

For more products, visit our website: http://www.bristan.com



Flow Rates (I/min)								
System Pressure (bar)		0.5	1	2	3	5		
PM SLWMBF C (Mixed)		10.14	14.4	20.36	25.08	32.28		

TECHNICAL



