BTZ BF C

BLITZ Tap Range Blitz Bath Filler Chrome



Specification				
Product Type:	Bathroom Taps			
Main Construction Material:	Brass			
Mount Type:	Deck			
Handle Type:	Paddle			
Connection Inlet:	3/4" BSP			
Connection Outlet:	M24 Flow Straightener			
Number of Tap Holes:	2			
Valve/Cartridge Type:	3/4" Ceramic Disc Valve - 1/4 turn			
Plumbing System Requirements:	Suitable for all plumbing systems			
Minimum Dynamic Pressure (bar):	0.2 bar			
Maximum Dynamic Pressure (bar):	5 bar			
Maximum Hot Water Temperature °C:	65°C			
Maximum Static Pressure (bar):	10 bar			
Flow Type:	Single			
Isolation Included:	No			

Features:

- Long life 1/4 turn ceramic disc valves for added durability and smooth control.
- Robust metal fixing nut to secure the tap in place reducing the risk of loosening over time.
- A hard-wearing, flawless, scratch resistant chrome finish that lasts for years. Salt spray tested to ensure added durability.
- 10 year parts and 1 year labour guarantee for peace of mind.
- Co-ordinating Bathroom taps, Recess shower and Accessories available.

Product Certifications:




WRAS Certificate No: 250703003 WRAS Expiry Date: 31/07/2030

For more products, visit our website: http://www.bristan.com



Dimensions (measurements in mm)

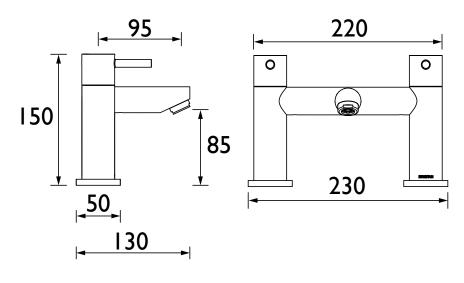

Flow Rates (I/min)								
System Pressure (bar)	0.2	0.5	1	2	3	5		
BTZ BF C (mixed)	14.2	22.5	31.8	44.9	55	71		

TECHNICAL DATA SHEET



