MH SNK EF WHT

MANHATTAN Tap Range Manhattan Easyfit Mono Sink Mixer White



F	\sim	$\overline{}$	TI		\boldsymbol{r}	\smallfrown	c	н
	_	а					$\overline{}$	
	_	9		-		~	_	

- A contemporary twin lever kitchen tap featuring Top Fix Easyfit technology.
- Unique patented top fix design, for simple installation from above the sink.
- Simply drop and twist the top fix base into the tap hole from above, and lock into place with the Allen key provided.
- Two supplied isolation valves and flexi tails mean you can connect to the water supply at this point and isolate the base.
- Push the tap on to the base and secure into position with the supplied Easyfit tool and screws.
- Everything you need in the box including an Allen key, isolation valves, Top Fix Easyfit base, Easyfit tool and flexi tails
- Swivel spout for easy use
- Long life 1/4 turn ceramic disc valves for added durability and smooth control.
- High quality metal fixings for security and durability
- Also available in other finishes.
- 10 year parts and 1 year labour guarantee for peace of mind.

Product Certifications:




WRAS Cert. Number: 2205909 WRAS Expiry Date: 31/05/2027

Water Label

♦36.4 I/min

Specification						
Product Type:	Kitchen Taps					
Main Construction Material:	Brass					
Mount Type:	Deck					
Handle Type:	Round					
Connection Inlet:	1/2" BSP Flexible Tails					
Connection Outlet:	M24 Flow Straightener					
Number of Tap Holes:	1					
Valve/Cartridge Type:	1/2" Ceramic Disc Valve					
Plumbing System Requirements:	Suitable for all plumbing systems, ideally balanced					
Minimum Dynamic Pressure (bar):	0.3 bar					
Maximum Dynamic Pressure (bar):	5.0 bar					
Maximum Hot Water Temperature °C:	60°C					
Maximum Static Pressure (bar):	10 bar					
Flow Type:	Single					
Isolation Included:	Yes					

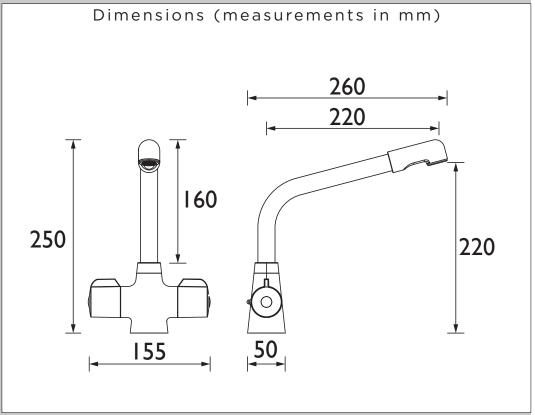

Flow Rates (I/min)									
System Pressure (bar)	0.3	0.5	1	2	3	5			
MH SNK EF WHT (mixed)	10.1	13.8	20.4	29.5	36.4	47.3			

TECHNICAL DATA SHEET





Bristan pursues a policy of continuous improvement in design and performance of its products and so reserves the right to change specifications without prior notice.