CLARET Tap Range Claret Wall Mounted **Bath Filler Chrome**

CLR WMBF C



Features:

- Long life ceramic cartridge for added durability and ease of use
- Easy to use metal handle
- Minimum working pressure of 0.3 bar
- Not suitable for use with roll top-baths.

Product Certifications:




WRAS Certificate No: 2207902 WRAS Expiry Date: 30/07/2027

For more products, visit our website: http://www.bristan.com



Specification				
Product Type:	Bathroom Taps			
Main Construction Material:	Brass			
Mount Type:	Wall Mounted			
Handle Type:	Triangular handle			
Connection Inlet:	15mm Compression			
Connection Outlet:	M24 Coin Slot Aerator			
Number of Tap Holes:	2			
Valve/Cartridge Type:	45mm Single Lever Cartridge			
Plumbing System Requirements:	Suitable for all plumbing systems			
Minimum Dynamic Pressure (bar):	0.3 bar			
Maximum Dynamic Pressure (bar):	5 bar			
Maximum Hot Water Temperature °C:	65°C			
Maximum Static Pressure (bar):	10 bar			
Flow Type:	Single Flow			
Isolation Included:	No			

Dimensions (measurements in mm)

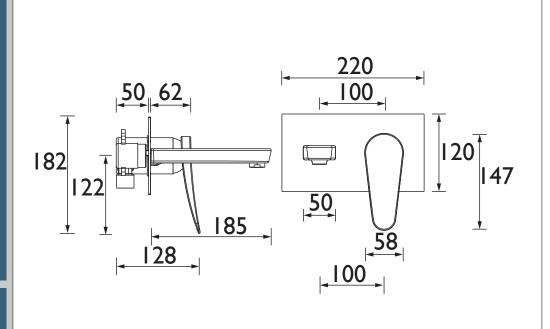

磁線	Flow Rates (I/min)							
	System Pressure (bar)	0.3	0.5	1	2	3	5	
	CLR WMBF C (mixed)	13.9	18	26.2	31.4	35	45.2	
TECHNICAL DATA SHEET	P QUALINA S S S S S S S S S S S S S S S S S S S		В	RIS	ST/	AN	D7	

Bristan, Birch Coppice Business Park, Dordon, Tamworth, B78 ISG. Web Site: www.bristan.com Telephone: 0330 026 6273. Email: enquire@bristan.com.

* - 10 year guarantee applies to products purchased on or after 01/04/2021. Non-chrome product finishes carry a 3 year guarantee on finish. See www.bristan.com/guarantees for more information. The information contained on this page was correct at date of issue. Fitting Dimensions are provided as a guide only. Some variation may occur due to manufacturing tolerances. Bristan pursues a policy of continuous improvement in design and performance of its products and so reserves the right to change specifications without prior notice.