

FZ SHXVOCTFF C

FRENZY Shower Range

Frenzy Safe Touch Bar Mixer
Valve only Fast Fix



Features:

- The Frenzy Thermostatic Shower combines simple, stylish design with modern functionality. Finished in scratch-resistant chrome, it features Safe Touch technology, which ensures the bar shower valve remains cool to the touch for family-friendly safety, and separate flow and temperature controls to deliver your ideal shower every time.
- Enjoy peace of mind with a 38°C safety stop, including override when required
- Stay protected with Safe Touch technology that keeps the valve cool to the touch
- Fast, hassle-free installation with built-in front facing isolation valves that make it easy to fit, maintain and replace.
- Built to last, backed by a lifetime parts and 1-year labour guarantee

Product Certifications:




WRAS Certificate No: 250203003
WRAS Expiry Date: 28/02/2030

Kiwa TMV2 Cert No: 2601731
Kiwa TMV2 Expiry Date: 26/01/2031

Specification

Finish/Colour:	Chrome Plated
Main Construction Material:	Brass, Zinc, Stainless Steel and ABS
No of Controls:	2
Shower Type:	Bar Shower
Valve/Cartridge Type:	Thermostatic Cartridge
Maximum Hot Water Supply Temperature °C:	60
Plumbing System Suitability:	Suitable for all plumbing systems, ideally balanced
Minimum Dynamic Pressure (bar):	0.2
Maximum Dynamic Pressure (bar):	5
Maximum Static Pressure (bar):	10
Connection Inlet:	15mm compression
Connection Outlet:	G 1/2"
Isolation Valve Included:	Yes
Check Valve Included:	Yes

Dimensions (measurements in mm)

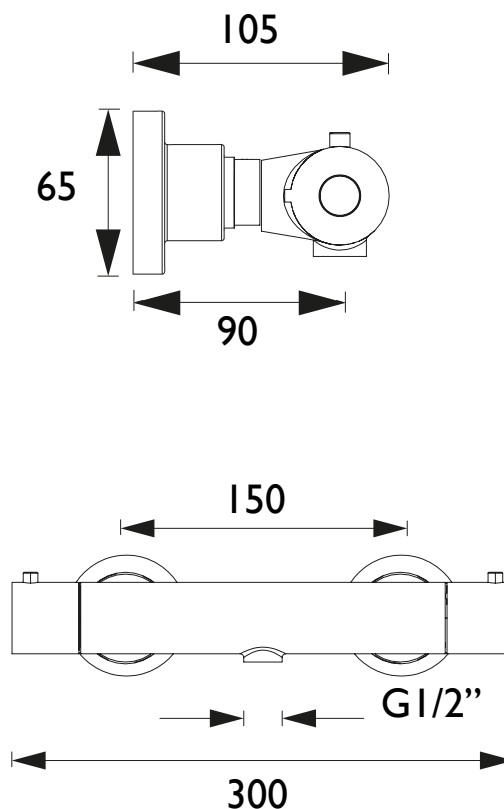

Flow Rates (l/min)

System Pressure (bar)	0.2	0.5	1	2	3	5
Valve Only (mixed)	4.2	7.3	10.9	15.7	19.2	24.5

TECHNICAL
DATA
SHEET



BRISTAN

D18