

FZ SHXVOCTFF C

FRENZY Shower Range Frenzy Cool Touch Bar Shower with Fast Fit Kit Chrome



Features:

- 15mm inlet connections
- Thermostatic cartridge with preset temperature stop at 38°C, can be over-riden to a maximum of 46°C
- Unique Safe Touch technology ensures the valves stays cool to the touch while in use
- Dual control - flow and temperature are controlled separately
- Supplied with a wall mount 12 fixing kit for easier retro installation

Product Certifications:



WRAS Certificate No: 1404021
WRAS Expiry Date: 30/04/2019



TMV2 Certificate No: BC1403/0614
TMV2 Expiry Date: 06/06/2019



For more products, visit our website:
<http://www.bristan.com>



Specification

Style:	Contemporary
Finish/Colour:	Chrome Plated
Main Construction Material:	Brass
No of Controls:	2
Shower Type:	Bar Shower
Shower Head Type:	None
Valve/Cartridge Type:	Thermostatic Cartridge
Maximum Hot Water Supply Temperature °C:	60
Maximum Static Pressure: (bar)	10
Plumbing System Suitability:	Suitable for all plumbing systems, ideally balanced
Working Pressure Range:	Min: 0.2 bar, Max: 5 bar
Connection Inlet:	15mm compression
Connection Outlet:	G 1/2"
Isolation Valve Included:	Yes
Check Valve Included:	Yes

Dimensions (measurements in mm)

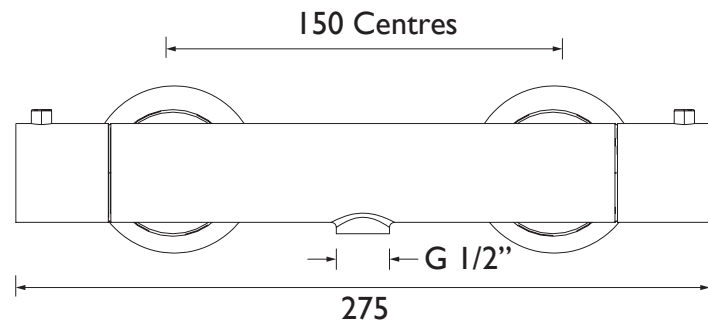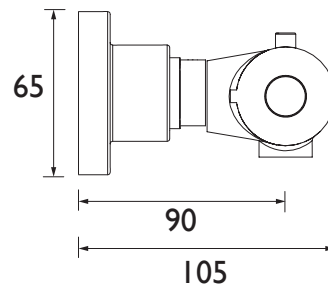

Flow Rates (l/min)

System Pressure (bar)	0.2	0.5	1	2	3	5
Open Outlet (mixed)	4.2	7.5	11.2	15.8	19.4	25

TECHNICAL DATA SHEET



BRISTAN

TAPS & SHOWERS

D5