

EVC KIT01 2M C

SHOWER ACC Shower Range

EVO Shower Kit with Large Single Function Handset and 2m Hose Chrome Plated



Features:

- Includes 2m hose, adjustable fixing brackets, rub-clean anti-limescale handset and hose retainer
- Supplied with 8L/min flow limiter
- Evo shelf also available
- Clam packed

Product Certifications:



WRAS Certificate No: 240503003
WRAS Expiry Date: TA|31/05/2029




For more products, visit our website:
<http://www.bristan.com>



Specification

Finish/Colour:	Chrome Plated
Main Construction Material:	Plastic
Shower Kit:	Adjustable Riser
Shower Head Type:	Single Function Handset
Rub Clean Handset:	Yes
Mounting Type:	Wall
Plumbing System Suitability:	Suitable for all plumbing systems
Minimum Dynamic Pressure (bar):	0.2 bar
Maximum Dynamic Pressure (bar):	5 bar
Maximum Static Pressure (bar):	10 bar
Maximum Hot Water Supply Temperature °C:	65
Connection Inlet:	G 1/2"
Connection Outlet:	G 1/2"
Isolation Included:	No
Check Valve Included:	No
What's Included:	1 x Riser Rail And End Brackets, 1 x Handset, 1 x Hose, 1 x Green Limiter, 4 x Screws, 4 x Rawl Plugs, 1 x Allen Key, 1 x Fitting Instructions

Dimensions (measurements in mm)

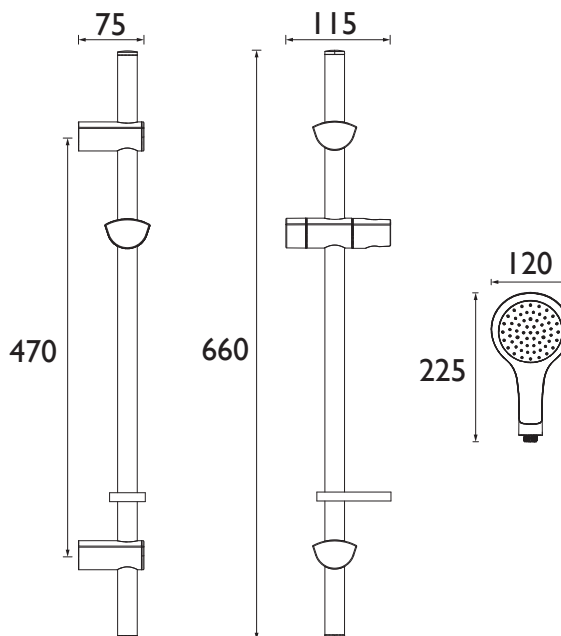

Flow Rates (l/min)

System Pressure (bar)	0.2	0.5	1	2	3	5
Through Handset (mixed)	4.5	7.1	10	14.2	17.4	22.5

TECHNICAL
DATA
SHEET



BRISTAN

D7

Bristan, Birch Coppice Business Park, Dordon, Tamworth, B78 1SG. Web Site: www.bristan.com Telephone: 0330 026 6273. Email: enquire@bristan.com.

* - **Non-chrome product finishes carry a 3 year guarantee on finish.** See www.bristan.com/guarantees for more information. The information contained on this page was correct at date of issue. Listed flow rates are indicative for the product. Different plumbing systems and flow regulators can produce higher or lower results. Fitting Dimensions are provided as a guide only. Some variation may occur due to manufacturing tolerances. Bristan pursues a policy of continuous improvement in design and performance of its products and so reserves the right to change specifications without prior notice.