OP THBF WMH C

OPAC Tap Range
Opac Thermostatic Wall Mount Dual Control Bath Filler with Chrome Handles



Specification					
Product Type:	Bathroom Tap				
Main Construction Material:	Brass				
Mount Type:	Wall Mounted				
Handle Type:	Round Handles				
Connection Inlet:	¾" BSP				
Connection Outlet:	½" BSP				
Number of Tap Holes:	2				
Valve/Cartridge Type:	Thermostatic Cartridge				
Plumbing System Requirements:	Suitable for all plumbing systems				
Minimum Dynamic Pressure:	0.2 Bar				
Maximum Dynamic Pressure:	5.0 Bar				
Maximum Hot Water Temperature: °C	80				
Maximum Static Pressure: (bar)	10				
Flow Type:	Single Flow				
Isolation Included:	Yes				

Features:

- Cool touch body for ultimate
- Integral isolator and easy clean
- Automatic thermostatic shut off in the event of hot or cold water failure
- Pre-set maximum temperature at 38°C which can be overridden
- TMV3 thermostatic valve

Product Certifications:




For more products, visit our website: http://www.bristan.com



	212 - 222	ĺ
	108	
74		30

Dimensions (measurements in mm)

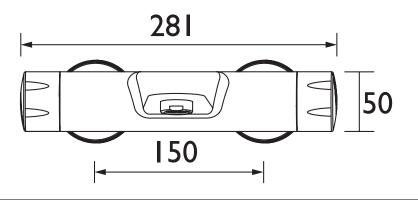

Flow Rates (I/min)									
System Pressure (bar)	0.2	0.5	1	2	3	5			
OP THBF WMH C	9	14	21	30	38	49			

TECHNICAL

