TECHNICAL DATA SHEET

PIVOT 5 Hole Bath Shower Mixer


Product Specification

Product Code: Finish: Product Type: Construction:

Valve Type: Supply: Inlet Connections: Working Pressures: PIV 5HBSM C Chrome plated Contemporary Bodies is of Brass construction and is designed to conform to BS EN 200 ¾" CD Valves ¼ Turn Suitable for high pressure plumbing systems. ¾" BSP Threaded Tail Min 0.5 Bar Max 5.0 Bar

Additional Information

- •Chrome plated to BS EN 248.
- Supplied with metal handles.
- •Supplied with rub clean handset and 2m hose.

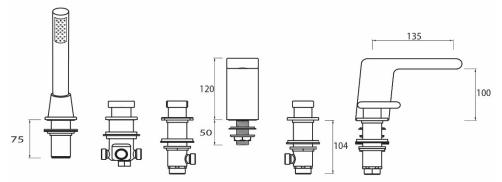

Flow Rates (litres per minute)

System Pressure	0.5 bar	1.0 bar	2.0 bar	3.0 bar	4.0 bar	5.0 bar
PIV 5HBSM C (mixed)	8.9	13.1	18.6	23.0	26.4	30.0
PIV 5HBSM C (shower)	5.0	7.5	10.6	13.4	15.5	17.7

Technical Advice:

For further information please call 0844 7016273 or email <u>customercare@bristan.com</u>.

Guarantee:

5 years covering manufacturing faults.

Bristan, Birch Coppice Business Park, Dordon, Tamworth, B78 1SG Telephone: 0844 701 6274 Facsimile: 0844 701 6275 Web Site: <u>www.bristan.com</u> Email: <u>enquire@bristan.com</u>

The information contained on this page was correct at date of issue. Fitting dimensions are provided as a guide only. Some variation may occur due to manufacturing tolerances. Bristan pursues a policy of continuing improvement in design and performance of its products and so reserves the right to change specifications without prior notice.



D1



T