

# MZ SNK EF BN

## MONZA Tap Range Monza Easyfit Sink Mixer Brushed Nickel




### Specification

|  |   |
|--|---|
| <b>Product Type:</b>                     | Kitchen Taps  |
| <b>Main Construction Material:</b>       | Brass   |
| <b>Mount Type:</b>                       | Deck  |
| <b>Handle Type:</b>                      | Lever   |
| <b>Connection Inlet:</b>                 | 1/2" BSP Flexible Tails with Isolation Valves       |
| <b>Connection Outlet:</b>                | M22 Aerator   |
| <b>Number of Tap Holes:</b>              | 1   |
| <b>Valve/Cartridge Type:</b>             | 1/2" Ceramic Disc Valve - 1/4 turn                  |
| <b>Plumbing System Requirements:</b>     | Suitable for all plumbing systems, ideally balanced |
| <b>Minimum Dynamic Pressure (bar):</b>   | 0.3 bar   |
| <b>Maximum Dynamic Pressure (bar):</b>   | 5 bar   |
| <b>Maximum Hot Water Temperature °C:</b> | 60°C  |
| <b>Maximum Static Pressure (bar):</b>    | 10 bar  |
| <b>Flow Type:</b>                        | Single  |
| <b>Isolation Included:</b>               | Yes   |

### Features:

- A contemporary twin lever kitchen tap featuring Top Fix Easyfit technology.
- Unique patented top fix design, for simple installation from above the sink.
- Simply drop and twist the top fix base into the tap hole from above, and lock into place with the Allen key provided.
- Two supplied isolation valves and flexi tails mean you can connect to the water supply at this point and isolate the base.
- Push the tap on to the base and secure into position with the supplied Easyfit tool and screws.
- Everything you need in the box including an Allen key, isolation valves, Top Fix Easyfit base, Easyfit tool and flexi tails
- Swivel spout for easy use
- Long life 1/4 turn ceramic disc valves for added durability and smooth control.
- High quality metal fixings for security and durability
- Also available in other finishes.
- 10 year parts and 1 year labour guarantee for peace of mind.

### Dimensions (measurements in mm)

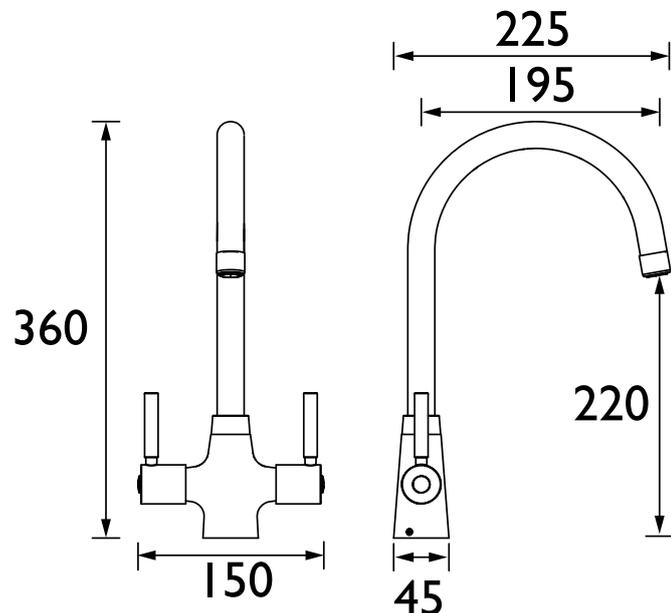

### Product Certifications:



WRAS Certificate No: 2012928  
WRAS Expiry Date: 31/12/2025



### Flow Rates (l/min)

| System Pressure (bar) | 0.3 | 0.5 | 1  | 2    | 3    | 5    |
|-----------------------|-----|-----|----|------|------|------|
| MZ SNK EF BN (mixed)  | 9.5 | 13  | 19 | 27.4 | 33.7 | 43.7 |

## TECHNICAL DATA SHEET



# BRISTAN

D11