WVP FHBS BC

WAVE Shower Range

WavePlus Dual Outlet Digital Mixer with Fixed Head and Bath Spout







Features:

- Minimalist capacitive touchscreen controller with no buttons or moving parts
- Thermostatic technology accurately and precisely maintains the required outlet temperature
- Warm up mode preheats the shower by flushing out cold water until the desired temperature is reached
- Pause mode remembers the shower settings used before soaping or shampooing and seamlessly re-introduces them when required
- User memory settings allow multiple users to store their preferred showering options, including flow rate, temperature and outlet

Product Certifications:


 ϵ

For more products, visit our website: http://www.bristan.com



| Specification | | | | | | |
|--|------------------------------------|--|--|--|--|--|
| Finish/Colour: | Black/Chrome | | | | | |
| Main Construction Material: | Brass; ABS | | | | | |
| No of Controls: | 1 | | | | | |
| Shower Type: | Digital | | | | | |
| Shower Kit Type: | Fixed Head | | | | | |
| Power Rating: | 240V AC / 12V DC | | | | | |
| Maximum Hot Water Supply Temperature °C: | 65 | | | | | |
| Maximum Static Pressure: (bar) | 10 | | | | | |
| Plumbing System Suitability: | Suitable for high pressure systems | | | | | |
| Working Pressure Range: | Min: 1 bar, Max: 6 bar | | | | | |
| Connection Inlet: | 1/2" BSP; Wired | | | | | |
| Connection Outlet: | 1/2" BSP | | | | | |
| Isolation Valve Included: | No | | | | | |
| Check Valve Included: | No | | | | | |

Dimensions (measurements in mm)

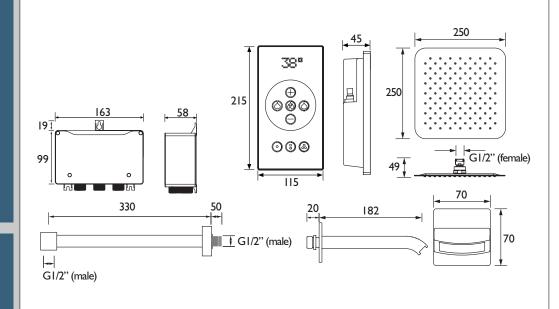

| Flow Rates (I/min) | | | | |
|-----------------------------|-----------|-----|-----------|------|
| System Pressure (bar) | Min 1 bar | | Max 6 bar | |
| | Min | Max | Min | Max |
| Through Bath Filler (Mixed) | 4.1 | 8.5 | 10 | 20.8 |
| Through Fixed Head (Mixed) | 4.1 | 8 | 10 | 19.6 |

TECHNICAL DATA SHEET



