EC SNK EF BN TO

ECHO Tap Range Echo Easyfit Mono Sink

Mixer Brushed Nickel Tap
Only



Features:

- Long life and easy to use 1/4 turn ceramic disc valves
- Product supplied without Easyfit base
- Minimum working pressure of 0.4 bar

| Specification | | | | |
|-----------------------------------|-----------------------------------|--|--|--|
| Product Type: | Kitchen Taps | | | |
| Main Construction Material: | Brass | | | |
| Mount Type: | Deck Mounted | | | |
| Handle Type: | Lever | | | |
| Connection Inlet: | 1/2" BSP Female Flexible Tails | | | |
| Connection Outlet: | M24 Aerator Laminar Max. Flow | | | |
| Number of Tap Holes: | 1 | | | |
| Valve/Cartridge Type: | 1/2" Ceramic Disc Valve | | | |
| Plumbing System Requirements: | Suitable for all plumbing systems | | | |
| Minimum Dynamic Pressure (bar): | 0.4 bar | | | |
| Maximum Dynamic Pressure (bar): | 5.0 bar | | | |
| Maximum Hot Water Temperature °C: | 65°C | | | |
| Maximum Static Pressure (bar): | 10 bar | | | |
| Flow Type: | Single | | | |
| Isolation Included: | Yes | | | |

Product Certifications:



WRAS Cert. Number: 2012918 WRAS Expiry Date: 31/12/2025






For more products, visit our website: http://www.bristan.com



Dimensions (measurements in mm)

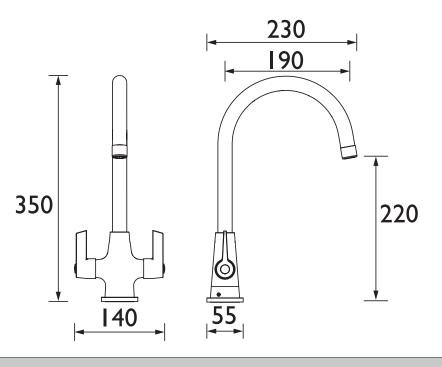

| Flow Rates (I/min) | | | | | | | | |
|-------------------------|------|------|------|------|------|------|--|--|
| System Pressure (bar) | 0.4 | 0.5 | 1 | 2 | 3 | 5 | | |
| EC SNK EF BN TO (mixed) | 10.8 | 12.0 | 17.0 | 24.1 | 29.5 | 38.1 | | |

TECHNICAL DATA SHEET



