

225911

HOURLASS Tap Range

Hourglass 5 Hole Bath
Shower Mixer Chrome



Features:

- Long life and easy to use 1/4 turn ceramic disc valves
- Metal back nuts for added durability
- Includes 1.75m hose and rub-clean anti-limescale handset
- Minimum working pressure of 0.4 bar

Product Certifications:



WRAS Certificate No: 2204329
WRAS Expiry Date: 30/04/2027



Kiwa Cert. No: 2204734
Kiwa Expiry Date: 21/04/2027




For more products, visit our website:
<http://www.bristan.com>



Specification

Product Type:	Bathroom Taps
Main Construction Material:	Brass
Mount Type:	Deck
Handle Type:	Paddle
Connection Inlet:	3/4" BSP
Connection Outlet:	M24 Flow Straightener
Number of Tap Holes:	5
Valve/Cartridge Type:	3/4" Ceramic Disc Valve
Plumbing System Requirements:	Suitable for Nominally Balanced Supply Pressures Only
Minimum Dynamic Pressure (bar):	0.4 bar
Maximum Dynamic Pressure (bar):	5 bar
Maximum Hot Water Temperature °C:	65°C
Maximum Static Pressure (bar):	10 bar
Flow Type:	Single
Isolation Included:	No

Dimensions (measurements in mm)

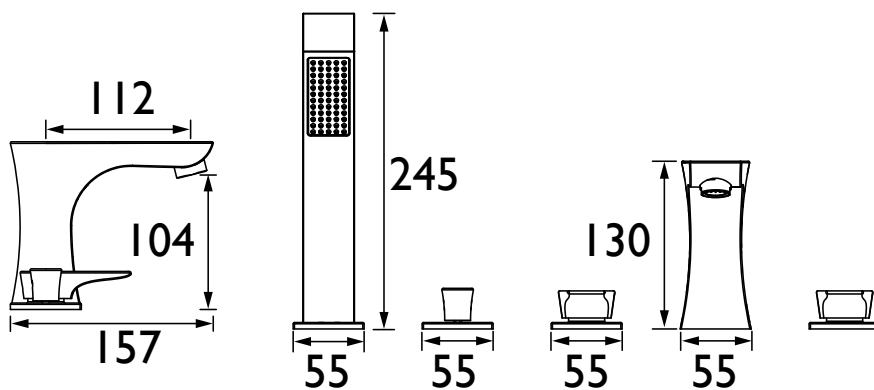

Flow Rates (l/min)

System Pressure (bar)	0.4	0.5	1	2	3	5
Through Bath Filler (mixed)	19.1	21.3	30.8	42.6	54.2	70
Through Handset (mixed)	6.2	6.9	9.8	13.9	17	22

TECHNICAL DATA SHEET



BRISTAN

D7