

ST PUMP20TN

Accessories
2.0 Bar Twin Ended Shower Pump Powered By
Stuart Turner



Specification


Pump Type:	Single Speed Twin Impeller
Power Supply:	230 Volts AC
Power Consumption:	420 Watts
Inlet Connections:	Flexible hose - 15mm push fit
Outlet Connections:	Flexible hose - 15mm push fit
Supply:	Suitable for gravity fed systems only
Max Inlet Head:	10 Meters
Max. Head (closed valve):	19 Meters
Motor Rating:	30 minutes on, 30 minutes off
Max. Working Pressure:	3.0 Bar
Pump Rating:	2 Bar / 35 LPM
Max. Inlet Water Temperature:	65°C

Features:


- Twin impeller for boosting two water supplies
- Fully automatic flow switch control - pump automatically starts when flow of water exceed 0.8 litres per min.
- High boost performance
- Low noise - fitted with anti-vibration feet.
- Min. inlet water temperature - 4°C
- Max. inlet water temperature - 65°C
- Max. number of starts per hour - 60
- Max. ambient air temperature - 40°C

Product Certifications:

For more products, visit our website:
<http://www.bristan.com>



Dimensions (measurements in mm)

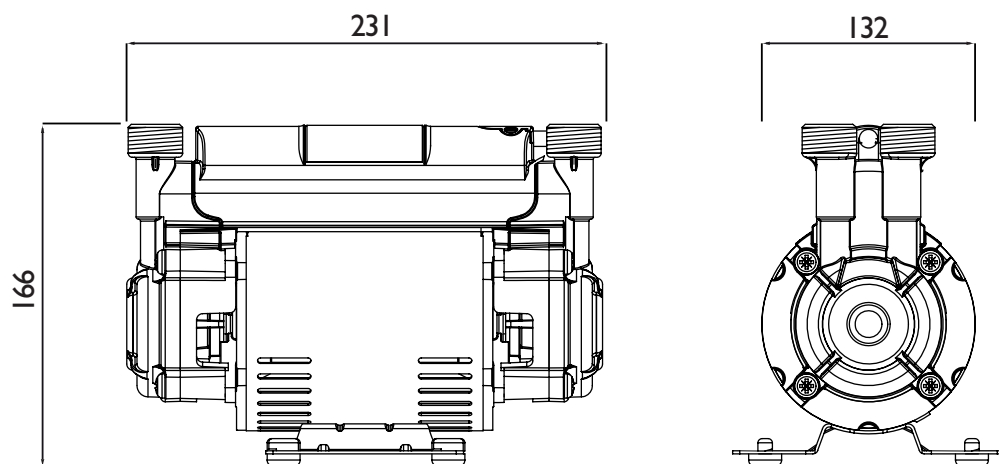

**TECHNICAL
DATA
SHEET**



BRISTAN
TAPS & SHOWERS D2