AL 2TH WMBAS C

ALTUM Tap Range Altum 2 Tap Hole Wall Mounted Basin Mixer Chrome



_	_	_	ъ.			_	_	
F	e	а	Τ.	u	r	e	S	
	_	9	ч	9		_	_	

- This tap has a flow regulator, which limits the flow of water to 5 litres per minute, reducing the amount of water you use.
- Long life ceramic cartridge for added durability and smooth control.
- A hard-wearing, flawless, scratch resistant chrome finish that lasts for years. Salt spray tested to ensure added durability.
- 10 year parts and 1 year labour guarantee for peace of mind.
- Also available in other finishes.

Product Certifications:

Water Label


♦4.6 l/min

For more products, visit our website: http://www.bristan.com



Specification					
Product Type:	Bathroom Taps				
Main Construction Material:	Brass				
Mount Type:	Wall				
Handle Type:	Lever				
Connection Inlet:	15mm Compression				
Connection Outlet:	M18 5lpm Aerator				
Number of Tap Holes:	2				
Valve/Cartridge Type:	35mm Single Lever Cartridge				
Plumbing System Requirements:	Suitable for all plumbing systems				
Minimum Dynamic Pressure (bar):	0.5 bar				
Maximum Dynamic Pressure (bar):	5 bar				
Maximum Hot Water Temperature °C:	60°C				
Maximum Static Pressure (bar):	10 bar				
Flow Type:	Single				
Isolation Included:	No				

Dimensions (measurements in mm)

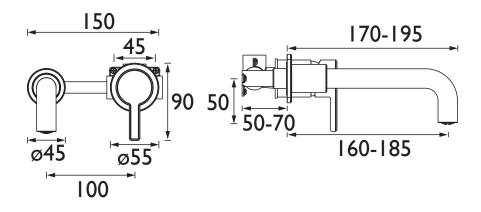

Flow Rates (I/min)										
System Pressure (bar)	0.5	1	2	3	4	5				
AL 2TH WMBAS C (mixed)	3.1	4.1	4.6	4.6	4.7	4.7				

TECHNICAL DATA SHEET



